

WUNDERKIND

CUSTOM



Installation and safety information

Fender



Indian Scout Bobber
From model year 2018



Caution



Important safety advice:

- Working on motorcycles poses a safety risk. Some work may only be carried out by appropriately qualified personnel. Faulty work can have serious consequences and may pose a threat to life and health. Only undertake installation works if you are sufficiently qualified and have an official workshop manual as well as all relevant service notifications available. Otherwise, we strongly recommend that the installation is carried out or at least checked in a specialist workshop.
- Any work in relation to the installation, removal and tightening torque of original parts should always be carried out in compliance with the workshop manual.
- All screws must be attached with thread-locking fluid. However, this should only be done after the installation is complete.
- It is your responsibility to check the product regularly and to determine if a service or replacement is required.
- Please bear in mind that some products are safety-relevant parts of your vehicle. After a fall or collision, check the product and if there is the slightest indication of damage, you must replace it.
- Some products require registration.
- These products have been designed for a standard vehicle. ABM® Fahrzeugtechnik GmbH makes no warranty or guarantee of any kind for any damages whatsoever arising out of the combination with other component parts not tested by ABM, as a consequence of improper installation or inadequate maintenance.
- Brake fluid may damage painted surfaces and fairings. Use suitable means to protect all of the surfaces against damage.

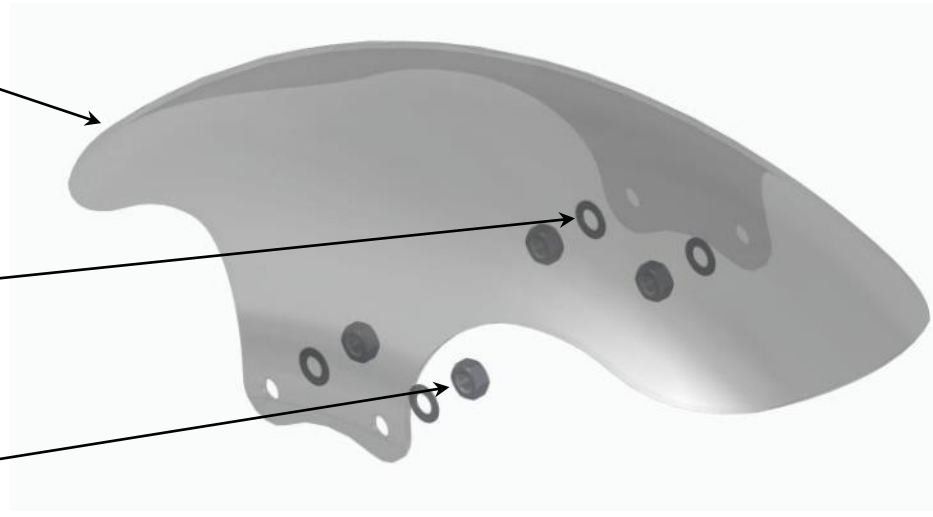
1 Preparation

- **Manufacturing-related tolerances may result in minor deviations in the fit. Before painting, the fender must be fitted and adjusted, where necessary.**
- Please read the entire safety information and installation manual carefully.
- A motorcycle not securely positioned can fall over during the following work. Therefore, make sure that the motorbike is positioned on solid, flat ground and is secured against falling over and rolling away.
- Keep children and pets away from the work area.
- Protect removed parts from damage.
- Please note when disassembling individual parts which screws are used to fasten them. Keep these parts and screws and unless specified otherwise, reuse when assembling.

2 Content and recommended accessories:

Special tool required?	Torque wrench	Modification time:	approx. 15 min
------------------------	---------------	--------------------	----------------

Content

No.	Item	
1	Fender	
4	Safety washer	
4	Nut	

3 Installation: Front fender



Raise the front wheel with a jack.

Caution:

Make sure that the motorbike is positioned securely



Loosen the four screws of the original fender and carefully remove the fender.



Carefully slide the new fender into the fork and fasten with the original screws.

Note: If necessary, push the fender together slightly.

Caution: Align the longer fender side to the front.



Mount the safety washers and nuts onto the screws.

Align the fender.



Fasten all four nuts.

Tightening torque 22 Nm

4 Final check

- All wires must be laid in a manner which prevents them from bending or getting pulled during spring deflection movements and which adequately protects them against rubbing.
- After completing the work, check that all components and screws are tight and functioning correctly. Also check the rear wheel's freewheel and the functionality of the brake system.
- Afterwards, a test drive must be done! After completing the test drive, the tightness of all screw connections must be checked, as well as the adequate freedom of access of all moving parts. Re-test the rear wheel's freewheel and check the brake system for overheating.

